

SR13.26.927

4.8W / 60 LED / 2700K / IP65



Key Specifications

| | |
|-------------------------|-----------------------|
| LED Type | SMD 2835 |
| LED Quantity | 60 LED/m |
| Power | 4.8 W/m |
| Colour Temperature | 2700 K |
| Lumen Output | 350 lm |
| CRI | >90 Ra |
| Beam Angle | 120° |
| Input Voltage | DC24 V |
| Input Current | 1 A |
| LED Pitch (Cut Segment) | 6 LED (100 mm) |
| SDCM | <3 |
| Dimmable | Yes |
| Lifespan | >50000 hours |
| Warranty | FIVE (5) year limited |

Physical

| | |
|---------------|-------------------|
| Base | Copper PCB, 8mm |
| Content | 2 oz |
| Adhesive Tape | 3M 300LSE (Brown) |
| Cable | 20 AWG, 2-wire |
| Length | 0.35 m each side |
| Packing | 5-metre roll |
| Net Weight | 0.23 kg |

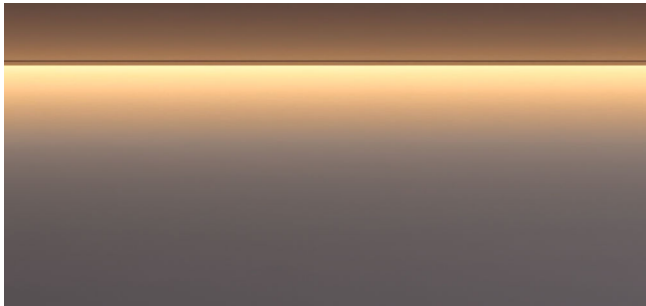


Image shot and provided for representation purpose. Actual light CCT may vary. Request for colour coordinates for accuracy.

Environmental

| | |
|--------------------------|-------------------|
| Installation Environment | Indirect Lighting |
| Operating Temperature | -20° to 40°C |
| Humidity | 10% to 90% RH |
| IP Rating | IP65 |

