

SR26.26.940

19.2W / 120 LED / 4000K / IP65



Key Specifications

LED Type	SMD 2835
LED Quantity	120 LED/m
Power	19.2 W/m
Colour Temperature	4000 K
Lumen Output	1780 lm
CRI	>90 Ra
Beam Angle	120°
Input Voltage	DC24 V
Input Current	4 A
LED Pitch (Cut Segment)	6 LED (50 mm)
SDCM	<3
Dimmable	Yes
Lifespan	>50000 hours
Warranty	FIVE (5) year limited

Physical

Base	Copper PCB, 10mm
Content	2 oz
Adhesive Tape	3M 300LSE (Brown)
Cable	20 AWG, 2-wire
Length	0.35 m each side
Packing	5-metre roll
Net Weight	0.27 kg

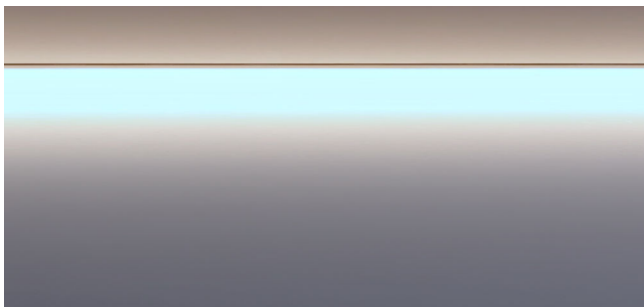


Image shot and provided for representation purpose. Actual light CCT may vary. Request for colour coordinates for accuracy.

Environmental

Installation Environment	Indirect Lighting
Operating Temperature	-20° to 40°C
Humidity	10% to 90% RH
IP Rating	IP65

