# SR26.27.924

19.2W / 120 LED / 2400K / IP67



## Key Specifications

| | |
|---|---|
| LED Type | SMD 2835 |
| LED Quantity | 120 LED/m |
| Power | 19.2 W/m |
| Colour Temperature | 2400 K |
| Lumen Output | 1440 lm |
| CRI | >90 Ra |
| Beam Angle | 120° |
| Input Voltage | DC24 V |
| Input Current | 4 A |
| LED Pitch (Cut Segment) | 6 LED (50 mm) |
| SDCM | <3 |
| Dimmable | Yes |
| Lifespan | >50000 hours |
| Warranty | FIVE (5) year limited |

## Physical

| | |
|---|---|
| Base | Copper PCB, 10mm |
| Content | 2 oz |
| Adhesive Tape | 3M 300LSE (Brown) |
| Cable | 20 AWG, 2-wire |
| Length | 0.35 m each side |
| Packing | 5-metre roll |
| Net Weight | 0.50 kg |

## Environmental

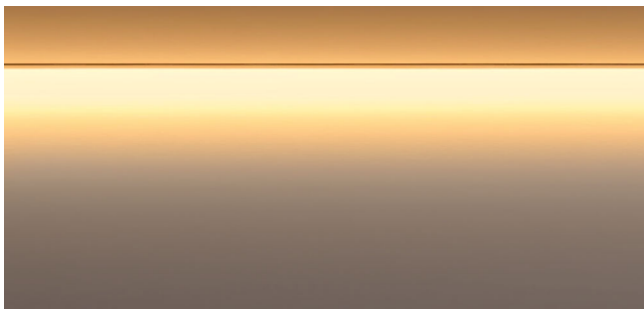| | |
|---|---|
| Installation Environment | Indirect Lighting |
| Operating Temperature | -20° to 40°C |
| Humidity | 10% to 90% RH |
| IP Rating | IP67 |



*Image shot and provided for representation purpose. Actual light CCT may vary. Request for colour coordinates for accuracy.*



50mm

8.3mm

12.5mm

Silicone Resin    Silicone Jacket

5.3mm

12.5mm

NAKASHI®