

DK15.22.940.08

14W / 4000K / 24° / IP44





Frame Colour Options

- White
- Black

Baffle Colour Options

- Matte White
- Metallic Chrome
- Metallic Gold
- Metallic Black
- Matte Black

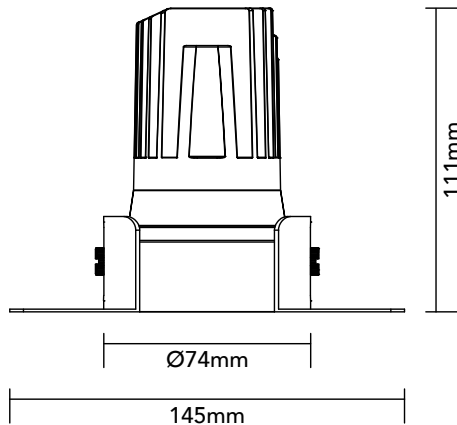

Ø83mm

Key Specifications

Shape	Round
Frame Type	Trimless
Engine Orientation	Adjustable
Lamp Type	LED
System Power	14 W
Colour Temperature	4000 K
Lumen Output	1050 lm
CRI	>90 Ra
Beam Angle	24°
Warranty	SEVEN (7) year limited

LED

Model	Citizen CLU701-1002C4
Colour Temperature	4000 K
SDCM	<3
Rated Lifespan	>100000 hours (L70)

Physical

Body Shell	Aluminium 6063
Frame	Aluminium 6063
Baffle	Powder Coated / UV Processed
Optics	PMMA Lens
Filter	Honeycomb Louvre (Optional)
Net Weight	0.17 kg

Environmental

Installation Environment	Ceiling
Mounting	Recessed
Operating Temperature	-20° to 40°C
Humidity	10% to 90% RH
IP Rating	IP44

Power Supplies

Input Current	350 mA
Input Voltage	AC220-240 V
Model On/Off	Tridonic 87500746
Model TRIAC Dimming	Philips Xitanium
Model 0-10V Dimming	LiFud AAA020
Model DALI Dimming	LiFud AAD020